


2FY20 K9 TRAINING CENTER - AMENDMENT 2

THIS AMENDMENT IS BEING PREPARED TO SUMMARIZE RESPONSES TO QUESTIONS THAT IMPACT THE BUILDING SPECIFICATIONS PREVIOUSLY OUTLINED.

- METAL BUILDINGS ARE 50' X 80' AS IDENTIFIED IN CONSTRUCTION DOCUMENTS.
- ALL CIVIL WILL BE COMPLETED OUTSIDE THIS PROJECT WITH THE EXCEPTION OF THE SIDEWALKS THAT RUN IN BETWEEN THE BUILDINGS. THE FRONT SIDE WALK THAT RUNS ALONG THE PARKING LOT AND PARKING LOT ITSELF ARE PART OF CIVIL SCOPE.
- FENCING FOR FIELD, AS OUTLINED IN CIVIL PLANS, WILL BE PROVIDED BY PSO AND IS NOT SUBJECT TO THIS SOLICITATION.
- THE FENCING FOR KENNEL BUILDING SHOULD BE CONSTRUCTED OUT OF GALVANIZED STEEL FRAME WITH DURABLE 6 GAGE CHAIN LINK WIRE MESH. WE WOULD RECOMMEND NOT GOING OVER 9 GAGE WIRE MESH AS THIS CAN REDUCE THE LEVEL OF SECURITY (AND DURABILITY) FOR THE FACILITY.
- COSTS FOR DOG KENNELS ARE TO BE INCLUDED IN CONTRACTOR'S BID. INSTALL IS PER WHICHEVER KENNEL MANUFACTURER IS CHOSEN BY CONTRACTOR. WE HAVE CALLED OUT TWO MANUFACTURERS; HOWEVER, AGAIN THOSE ARE NOT REQUIRED. WE WANT TO MAKE SURE WHICHEVER VENDOR IS CHOSEN, THE MODULAR KENNEL SPECIFICATIONS ARE APPLICABLE FOR MILITARY OR LAW ENFORCEMENT WORKING DOGS. THE KENNELS SHOULD HAVE TOP COVERS TO PREVENT CLIMBING FROM ONE BAY TO THE NEXT. SOLID WALL PANELS THE ENTIRE HEIGHT WOULD BE PREFERRED. THE KENNELS TO NOT NEED FOOD AND WATER BOWLS.
- GUTTERS AND DOWNSPOUTS ARE REQUIRED FOR ALL THREE BUILDINGS
- PHONE SYSTEM WILL BE PROVIDED AND MAINTAINED BY PASCO COUNTY
- IT EQUIPMENT SHOULD BE FURNISHED BY CONTRACTOR. PSO WILL CONFIGURE AND INSTALL IT SWITCHES.
- THE PRIMARY POWER SUPPLY/TRANSFORMER IS INSTALLED IN THE NORTHEAST CORNER OF THE SITE. APPROXIMATE LOCATION INDICATED BELOW.

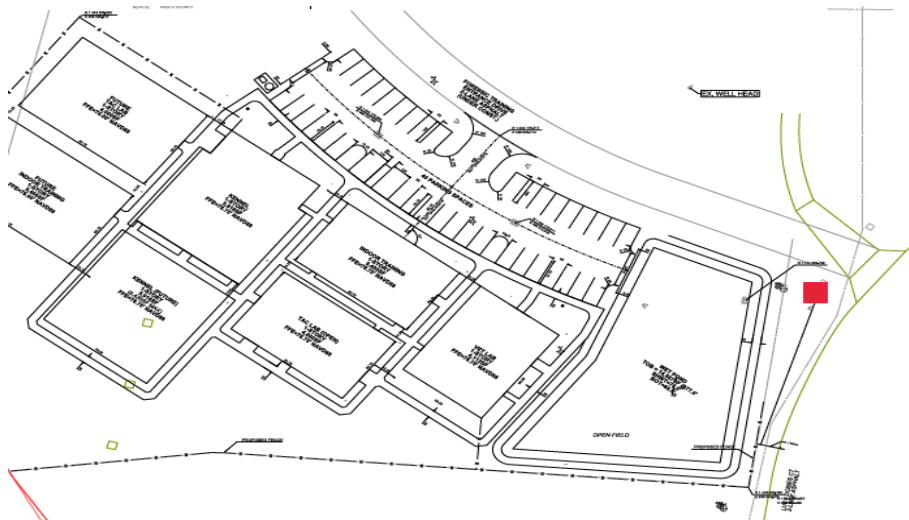

- NO FIRE ALARM SYSTEM IS REQUIRED.
- COUNTY VENDOR FOR SECURITY AND PROXIMITY ACCESS IS SKYNET. CONTACT DAVID WHITE DAVID@SKYNET-I.COM

CORRECTIONS/CLARIFICATIONS OF DRAWINGS:

1. ALL METAL BUILDINGS INCLUDE THE METAL ROOF AS PART OF THE BUILDING PACKAGE. FOR THE KENNEL BUILDING ROOFING, PLEASE USE: MERCHANT + EVANS 2" ZIP-LOK STANDING SEAM PANEL ROOF 16" COVERAGE, 24 GAGE GALVANIZED COATED STEEL, SMOOTH TEXTURE FINISH. ALTERNATE ROOFING REQUIRES SUBMITTAL FOR APPROVAL.
2. INSULATION SPECIFICATIONS FOR ROOF UNLESS OTHERWISE SPECIFIED IS R-30
3. IF COLUMNS OF THE METAL BUILDINGS CONFLICT WITH STRUCTURAL SPECIFICATIONS (I.E. BATHROOMS), PLEASE PROVIDE THE METAL BUILDING MANUFACTURER AND STRUCTURAL LOCATIONS. WE WILL PROVIDE TO ARCHITECT/ENGINEER TO LOOK AT THE LOCATIONS OF THE COLUMNS AND RELOCATE ELEMENTS AS NEEDED.
4. INDOOR TRAINING OFFICE:
 - A. PLEASE INCREASE THE BUILDING HEIGHT OF INDOOR TRAINING OFFICE SO THE LOW EAVE HEIGHT IS AT 11'-0" AS TO NOT CONFLICT WITH DESIGN SPECIFICATIONS.
 - B. SHOULD BE 4" THICK CONCRETE SLAB ON GRADE AS INDICATED IN FOUNDATION NOTE 1 ON SHEET A1.1, NOT 6".
 - C. DOOR 103A IS A SINGLE DOOR NOT A DOUBLE DOOR.
 - D. DOOR 107A WOULD BE SOLID GLASS. DOOR 117A WOULD HAVE NO GLASS WITHIN IT.
5. K9 KENNEL:
 - A. DOOR 108A IS NOT AN EGRESS DOOR. THIS IS JUST A STANDARD DOUBLE DOOR.
 - B. THE HARDWARE FOR GROUP 4 WOULD BE: THREE HINGES, LEAVER STYLE DOOR HANDLE, WITH 24" KICKPLATE ON BOTH SIDES OF THE DOOR. DOOR 109A, 110A, 110 B, 111A, AND 111B WOULD BE IN HARDWARE GROUP #1.
 - C. DOOR 101B SHOULD BE SOLID LIKE ALL OTHER DOORS. THERE WOULD BE NO GLASS LOCATED WITHIN THIS DOOR.
 - D. TO CLARIFY SHEETS A1.1, A1.3, A4.0, AND A4.1, THERE ARE THREE COLUMNS LOCATED IN THE WALL. WHAT IS LOOKS LIKE COLUMNS AT THE END OF THE WALLS ARE IN FACT BLOCK WALLS WITH DOORS WITHIN THEM. THE FINISH FOR THE COLUMNS ARE TO BE STUCCO. PLEASE SEE WALL SECTION DETAIL 1/A5.1.
 - E. LINTEL L-1 (A1.3) IS A TYPO AND SHOULD NOT HAVE BEEN INCLUDED ON THE SET. PLEASE DISREGARD LINTEL L-1.
 - F. SHEET A1.2 WALL TYPES D AND E INDICATE WOOD FRAMING. PLEASE DISREGARD THIS NOTE. THIS IS A TYPO.
 - G. THE MIDDLE WALL THAT SPLITS THE KENNELS INTO TWO BANKS SHOULD BE CMU AS SHOWN IN THE FOUNDATION PLAN PER A1.2 AND LINTEL PLAN PER A1.3, NOT WOOD FRAMED.
 - H. THE "STUCCO WITH STONE FINISH" CALLED OUT ON K9 KENNEL IS JUST ROUGH STUCCO FINISH INSTEAD OF A SMOOTH STUCCO FINISH.

PLEASE VISIT WWW.DEMANDSTAR.COM OR WWW.PASCOSHERIFF.COM CITIZEN RESOURCES → RESOURCES → VENDOR RESOURCES TO SEE ADDITIONAL QUESTIONS FROM PROSPECTIVE BIDDERS AND OUR RESPONSES.